

x = the minimum thickness of wood i.e.

For FD30 doors x = 10mm of softwood (7.5mm of hardwood)

For FD60 doors x = 19mm of softwood ( 15mm of hardwood)

Figure 4.11 - Double chain concealed jamb closer

## Cylinder Rim Night Latch

Commonly known as "Yale" locks although they are manufactured by a number of different companies



Figure 4.21 - Cylinder Rim Night Latch


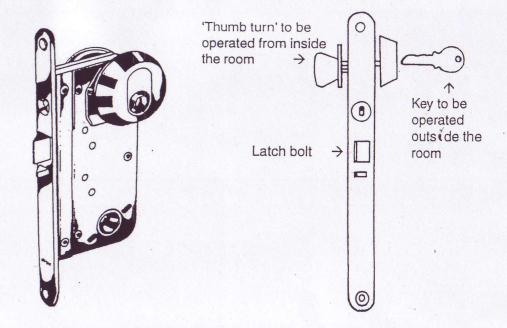


Figure 4.19 - Mortice Nightlatch



Note the 'thumb turn' operated lock. The turn should be sited on the room side of the door to facilitate escape without the use of a key.

Figure 4.18 -Combined lock and latch unit